



ISO Thread Form

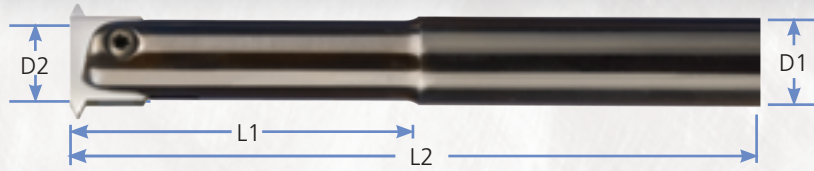


Internal Threading Tool


Insert Part Number	Holder Part Number	Holder Description	D2	L1	L2	D1	Maximum Thread Depth	Nominal Size ISO	Pitch
175-1030	190-2092	OTM-06-150-12	5	46	150	12	45	12	1,75
↓	↓	↓	↓	↓	150	↓	↓	16	2
↓	↓	↓	↓	↓	150	↓	↓	18	2,5
175-1003	190-1113	CYF-12-150-12	10,8	46	150	12	44	20	2,5
↓	190-1123	CBCYF-12-150-12	10,8	52	150	12	50	22	2,5
↓	190-1103	OTM-12-150-11	11	na	150	11	100	24	3
↓	↓	↓	↓	↓	150	↓	↓	27	3
175-1004	190-1114	CYF-16-160-16	14,4	50	160	16	48	30	3,5
↓	190-1124	CBCYF-16-150-16	14,4	52	150	16	50	33	3,5
↓	190-1104	OTM-16-150-14	14	na	150	14	100	36	4
↓	↓	↓	↓	↓	150	↓	↓	39	4
↓	↓	↓	↓	↓	150	↓	↓	42	4,5
↓	↓	↓	↓	↓	150	↓	↓	45	4,5
175-1005	190-1115	CYF-30/32-250-32	28,6	76	250	32	72	48	5
↓	190-1105	OTM-30/32-200-23	25	na	200	25	150	52	5
↓	↓	↓	↓	↓	200	↓	↓	56	5,5
↓	↓	↓	↓	↓	200	↓	↓	60	5,5
↓	↓	↓	↓	↓	200	↓	↓	64	6
↓	↓	↓	↓	↓	200	↓	↓	68	6




M12-M18
ISO Thread Form
Insert



M20-M27
ISO Thread Form
Internal
Threading Tool



M30-M45
ISO Thread Form
Internal
Threading Tool



ISO Thread Form
Internal
Threading Tool